

TEGA IPS SERIES SDR11

Molded Electrofusion 90 Degree Equal Elbow

Water - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Suitable for Water, Fluids & Slurry's


Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513

ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906

DIN16963, EN1555, EN12201, ISO-9001/2000

Also suitable for use on IPS SDR13.5, SDR15.5, SDR17 Series HDPE pipe

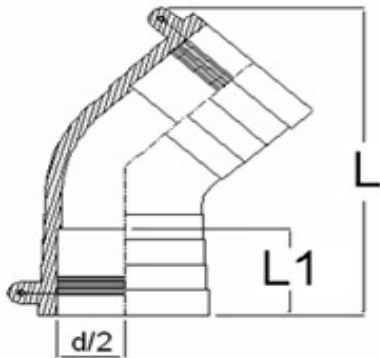

Nominal Pipe Size	Pipe	Pipe	"L"	"L1"	Unit Weight	Item Code
3/4"	IPS	1.050"	3.860"	1.500"	0.150 lbs	30.DD1.11.11.0026
1"	CTS	TBA	4.290"	1.610"	0.310 lbs	30.DD1.33.11.0028
1"	IPS	1.315"	4.290"	1.610"	0.220 lbs	30.DD1.11.11.0033
1 1/4"	IPS	1.660"	5.160"	1.850"	0.370 lbs	30.DD1.11.11.0042
1 1/2"	IPS	1.900"	6.100"	2.010"	0.620 lbs	30.DD1.11.11.0048
2"	IPS	2.375"	7.440"	1.890"	1.150 lbs	30.DD1.11.11.0060
3"	IPS	3.500"	9.530"	2.760"	2.450 lbs	30.DD1.11.11.0088
4"	IPS	4.500"	11.690"	3.230"	6.610 lbs	30.DD1.11.11.0114

STRONGBRIDGE INTERNATIONAL INC.

10920 Baymeadows Road, Unit 27-302

Jacksonville, FL 32256

Phone: (904) 607-6384 Fax:(904) 565-2776

www.strongbridge.us

STRONGBRIDGE INTERNATIONAL (CANADA) INC.

200 North Service Road West, Unit 1 Suite 381

Oakville, Ontario L6M 2Y1

Phone (416) 795-8962

www.strongbridgecanada.com

TEGA ELECTROFUSION FITTINGS MAY ONLY BE INSTALLED BY TECHICIANS CERTIFIED BY STRONGBRIDGE INTERNATIONAL INC. OR ITS DESIGNATED AND APPROVED AGENTS. CONTACT STRONGBRIDGE INTERNATIONAL FOR CURRENT CERTIFICATION DETAILS AND REQUIREMENTS.