

## TEGA IPS SERIES SDR11

Molded Electrofusion 90 Degree Equal Elbow

**Water - 240 PSI** at 73 Deg F Sustainable Maximum Operating Pressure

**Gas - 150 PSI** at 73 Deg F Sustainable Maximum Operating Pressure

Suitable for Water, Fluids & Slurry's


Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513

ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906

DIN16963, EN1555, EN12201, ISO-9001/2000

**Also suitable for use on IPS SDR13.5, SDR15.5, SDR17 Series HDPE pipe**

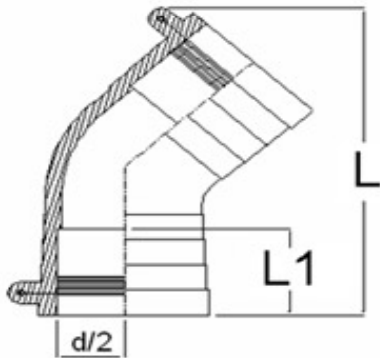

Nominal Pipe Size	Pipe	Pipe	"L"	"L1"	Unit Weight	Item Code
3/4"	IPS	1.050"	3.860"	1.500"	0.150 lbs	30.DD1.11.11.0026
1"	CTS	TBA	4.290"	1.610"	0.310 lbs	30.DD1.33.11.0028
1"	IPS	1.315"	4.290"	1.610"	0.220 lbs	30.DD1.11.11.0033
1 1/4"	IPS	1.660"	5.160"	1.850"	0.370 lbs	30.DD1.11.11.0042
1 1/2"	IPS	1.900"	6.100"	2.010"	0.620 lbs	30.DD1.11.11.0048
2"	IPS	2.375"	7.440"	1.890"	1.150 lbs	30.DD1.11.11.0060
3"	IPS	3.500"	9.530"	2.760"	2.450 lbs	30.DD1.11.11.0088
4"	IPS	4.500"	11.690"	3.230"	6.610 lbs	30.DD1.11.11.0114

**STRONGBRIDGE INTERNATIONAL INC.**

PO Box 58177, Jacksonville FL 32241

Phone: (904) 607-6384 Fax:(904) 565-2776

[www.strongstrongbridgebridge.usus](http://www.strongstrongbridgebridge.usus)

**STRONGBRIDGE INTERNATIONAL (CANADA) INC.**

200 North Service Road West, Unit 1 Suite 381

Oakville, Ontario L6M 2Y1

Phone (416) 795-8962

[www.strongbridgecanada.com](http://www.strongbridgecanada.com)

**ELECTROFUSION FITTINGS MUST BE INSTALLED BY QUALIFIED INDIVIDUALS TRAINED AND CERTIFIED IN ELECTROFUSION INSTALLATION PROCEDURES.**