

TEGA IPS SERIES SDR11

Molded Electrofusion Reducer

Water - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Suitable for Water, Fluids & Slurry's


Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513

ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906

DIN16963, EN1555, EN12201, ISO-9001/2000

Also suitable for use on IPS SDR13.5, SDR15.5, SDR17 Series HDPE pipe

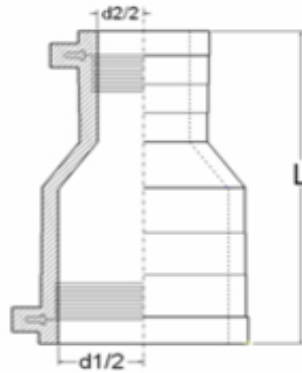

Nominal Pipe Size	Pipe	"d1/2"	"d2/2"	"L"	Unit Weight	Item Code
1" X 1/2"	IPS X IPS	1.315"	1.315"	3.540"	0.110 lbs	30.RE1.11.11.3321
1" X 3/4"	IPS X CTS	1.315"	TBA	3.540"	0.110 lbs	30.RE1.13.11.3322
1" X 3/4"	IPS X IPS	1.315"	1.050"	3.540"	0.120 lbs	30.RE1.11.11.3326
1 1/4" X 1"	IPS X IPS	1.660"	1.315"	4.610"	0.200 lbs	30.RE1.11.11.4233
1 1/2" X 1"	IPS X IPS	1.900"	1.315"	5.160"	0.330 lbs	30.RE1.11.11.4833
2" X 1"	IPS X IPS	2.375"	1.315"	5.590"	0.490 lbs	30.RE1.11.11.6033
2" X 1 1/4"	IPS X IPS	2.375"	1.660"	5.470"	0.540 lbs	30.RE1.11.11.6042
2" X 1 1/2"	IPS X IPS	2.375"	1.900"	5.980"	0.580 lbs	30.RE1.11.11.6048
3" X 2"	IPS X IPS	3.500"	2.375"	7.480"	1.300 lbs	30.RE1.11.11.8860
4" X 2"	IPS X IPS	4.500"	2.375"	8.230"	1.950 lbs	30.RE1.11.11.1160
4" X 3"	IPS X IPS	4.500"	3.500"	8.460"	2.410 lbs	30.RE1.11.11.1188

STRONGBRIDGE INTERNATIONAL INC.

10920 Baymeadows Road, Unit 27-302

Jacksonville, FL 32256

Phone: (904) 607-6384 Fax:(904) 565-2776

www.strongbridge.us

STRONGBRIDGE INTERNATIONAL (CANADA) INC.

200 North Service Road West, Unit 1 Suite 381

Oakville, Ontario L6M 2Y1

Phone (416) 795-8962

www.strongbridgecanada.com

TEGA ELECTROFUSION FITTINGS MAY ONLY BE INSTALLED BY TECHICIANS CERTIFIED BY STRONGBRIDGE INTERNATIONAL INC. OR ITS DESIGNATED AND APPROVED AGENTS. CONTACT STRONGBRIDGE INTERNATIONAL FOR CURRENT CERTIFICATION DETAILS AND REQUIREMENTS.

