

# TEGA IPS SERIES SDR32.5

## ELECTROFUSION COUPLER

**50 PSI @ 73 Degrees** Maximum Sustainable Operating Pressure


Suitable for Water, Fluids & Slurry's

Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513

ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906

DIN16963, EN1555, EN12201, ISO-9001/2000

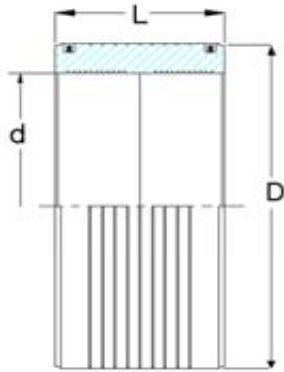

Nominal Pipe Size	"d"	"D"	"L"	Unit Weight	Item Code
28"	28.000"	30.710"	9.650"	40.560 lbs	30.MA1.11.27.0711
30"	30.000"	33.070"	9.650"	50.260 lbs	30.MA1.11.27.0762
32"	32.000"	35.430"	9.650"	59.970 lbs	30.MA1.11.27.0812
34"	34.000"	37.400"	11.000"	71.870 lbs	30.MA1.11.27.0863
36"	36.000"	40.550"	13.800"	129.000 lbs	30.MA1.11.27.0914
42"	42.000"	46.460"	13.800"	146.400 lbs	30.MA1.11.27.1066
48"	48.000"	53.150"	13.800"	193.000 lbs	30.MA1.11.27.1219
54"	54.000"	59.060"	13.800"	212.100 lbs	30.MA1.11.27.1371
63"	63.000"	68.900"	13.800"	288.600 lbs	30.MA1.11.27.1600

### STRONGBRIDGE INTERNATIONAL INC.

10920 Baymeadows Road, Unit 27-302

Jacksonville, FL 32256

Phone: (904) 607-6384 Fax:(904) 565-2776

[www.strongbridge.us](http://www.strongbridge.us)

### STRONGBRIDGE INTERNATIONAL (CANADA) INC.

200 North Service Road West, Unit 1 Suite 381

Oakville, Ontario L6M 2Y1

Phone (416) 795-8962

[www.strongbridgecanada.com](http://www.strongbridgecanada.com)

TEGA ELECTROFUSION FITTINGS MAY ONLY BE INSTALLED BY TECHICIANS CERTIFIED BY STRONGBRIDGE INTERNATIONAL INC. OR ITS DESIGNATED AND APPROVED AGENTS. CONTACT STRONGBRIDGE INTERNATIONAL FOR CURRENT CERTIFICATION DETAILS AND REQUIREMENTS.

Copyright 2009 Strongbridge International Inc. All rights reserved. Information subject to change without notice. E. & O.E. Subject to Strongbridge International Inc. Limited Warranty, available at [www.strongbridge.us](http://www.strongbridge.us)