

TEGA DIPS SERIES SDR17

ELECTROFUSION COUPLER

160 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Suitable for Water, Fluids & Slurry's


Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513

ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA, C-906

DIN16963, EN1555, EN12201, ISO-9001/2000

Also suitable for use on DIPS SDR21 Series HDPE pipe

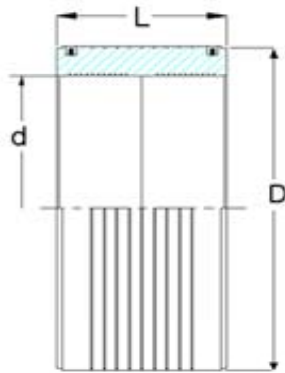

| Nominal Pipe Size | "d" | "D" | "L" | Unit Weight | Item Code |
|-------------------|---------|---------|---------|-------------|-------------------|
| 4" | 4.800" | | TBA | | 30.MA1.22.17.0121 |
| 6" | 6.900" | 8.460" | 7.870" | 5.000 lbs | 30.MA1.22.17.0175 |
| 8" | 9.050" | 10.600" | 8.050" | 6.350 lbs | 30.MA1.22.17.0229 |
| 10" | 11.100" | 13.000" | 8.660" | 11.020 lbs | 30.MA1.22.17.0281 |
| 12" | 13.200" | 15.350" | 9.060" | 15.000 lbs | 30.MA1.22.17.0335 |
| 14" | 15.300" | 18.300" | 11.800" | 32.400 lbs | 30.MA1.22.17.0388 |
| 16" | 17.400" | 20.860" | 12.600" | 45.100 lbs | 30.MA1.22.17.0441 |
| 18" | 19.500" | 23.200" | 14.400" | 61.250 lbs | 30.MA1.22.17.0495 |
| 20" | 21.600" | 26.500" | 15.700" | 97.000 lbs | 30.MA1.22.17.0548 |
| 24" | 25.800" | 30.500" | 16.500" | 116.000 lbs | 30.MA1.22.17.0655 |
| 30" | 32.000" | 37.400" | 18.500" | 188.850 lbs | 30.MA1.22.17.0812 |
| 36" | 38.300" | | TBA | | 30.MA1.22.17.0972 |
| 42" | 44.500" | | TBA | | 30.MA1.22.17.1130 |
| 48" | 50.800" | | TBA | | 30.MA1.22.17.1290 |

STRONGBRIDGE INTERNATIONAL INC.
PO Box 58177, Jacksonville FL 32241

Phone: (904) 607-6384 Fax:(904) 565-2776

www.strongbridge.us

STRONGBRIDGE INTERNATIONAL (CANADA) INC.

200 North Service Road West, Unit 1 Suite 381
Oakville, Ontario L6M 2Y1

Phone (416) 795-8962

www.strongbridgecanada.com

ELECTROFUSION FITTINGS MUST BE INSTALLED BY QUALIFIED INDIVIDUALS TRAINED AND CERTIFIED IN
ELECTROFUSION INSTALLATION PROCEDURES.

Copyright 2009 Strongbridge International Inc. All rights reserved. Information subject to change without notice. E. & O.E.

Subject to Strongbridge International Inc. Limited Warranty, available at www.strongbridge.us