

TEGA DIPS SERIES SDR11

ELECTROFUSION COUPLER

200 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Suitable for Water, Fluids & Slurry's


Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513

ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906

DIN16963, EN1555, EN12201, ISO-9001/2000

Also suitable for use on DIPS SDR13.5 & SDR17 Series HDPE pipe

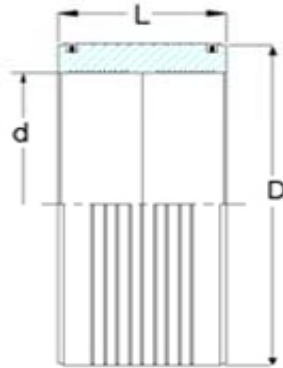

Nominal Pipe					
Size	"d"	"D"	"L"	Unit Weight	Item Code
4"	4.800"		TBA		30.MA1.22.11.0121
6"	6.900"	8.460"	7.870"	5.000 lbs	30.MA1.22.11.0175
8"	9.050"	10.600"	8.050"	6.350 lbs	30.MA1.22.11.0229
10"	11.100"	13.000"	8.660"	11.020 lbs	30.MA1.22.11.0281
12"	13.200"	15.350"	9.060"	15.000 lbs	30.MA1.22.11.0335
14"	15.300"	18.300"	11.800"	32.400 lbs	30.MA1.22.11.0388
16"	17.400"	20.860"	12.600"	45.100 lbs	30.MA1.22.11.0441
18"	19.500"	23.200"	14.400"	61.250 lbs	30.MA1.22.11.0495
20"	21.600"	26.500"	15.700"	97.000 lbs	30.MA1.22.11.0548
24"	25.800"	30.500"	16.500"	116.000 lbs	30.MA1.22.11.0655
30"	32.000"	37.400"	18.500"	188.850 lbs	30.MA1.22.11.0812
36"	38.300"		TBA		30.MA1.22.11.0972
42"	44.500"		TBA		30.MA1.22.11.1130
48"	50.800"		TBA		30.MA1.22.11.1290

220/240 psi Maximum Working Pressure Couplers Available Under Special Order On All Sizes Listed

STRONGBRIDGE INTERNATIONAL INC.

PO Box 58177, Jacksonville FL 32241

Phone: (904) 607-6384 Fax:(904) 565-2776

www.strongbridge.us

STRONGBRIDGE INTERNATIONAL (CANADA) INC.

200 North Service Road West, Unit 1 Suite 381

Oakville, Ontario L6M 2Y1

Phone (416) 795-8962

www.strongbridgecanada.com

ELECTROFUSION FITTINGS MUST BE INSTALLED BY QUALIFIED INDIVIDUALS TRAINED AND CERTIFIED IN ELECTROFUSION INSTALLATION PROCEDURES.

