



**STRONGBRIDGE**  
INTERNATIONAL INC.

## TEGA DIPS SERIES SDR26

ELECTROFUSION COUPLER

**100 PSI** at 73 Deg F Sustainable Maximum Operating Pressure

Suitable for Water, Fluids & Slurry's



Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513

ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906

DIN16963, EN1555, EN12201, ISO-9001/2000

**Also suitable for use on DIPS SDR32.5 Series HDPE pipe**

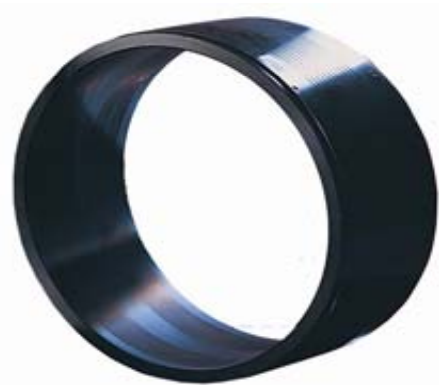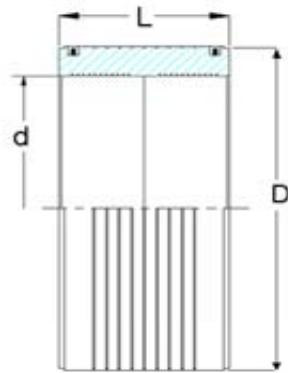

Nominal Pipe Size	"d"	"D"	"L"	Unit Weight	Item Code
4"	4.800"	5.300"	3.940"	0.550 lbs	30.MA1.22.27.0121
6"	6.900"	7.670"	6.300"	1.870 lbs	30.MA1.22.27.0175
8"	9.050"		TBA		30.MA1.22.27.0229
10"	11.100"	12.200"	6.500"	4.540 lbs	30.MA1.22.27.0281
12"	13.200"	15.000"	7.080"	9.400 lbs	30.MA1.22.27.0335
14"	15.300"	17.100"	8.660"	13.580 lbs	30.MA1.22.27.0388
16"	17.400"	19.250"	8.660"	16.300 lbs	30.MA1.22.27.0441
18"	19.500"	21.500"	8.660"	18.600 lbs	30.MA1.22.27.0495
20"	21.600"	24.200"	9.840"	31.300 lbs	30.MA1.22.27.0548
24"	25.800"	29.500"	12.900"	70.500 lbs	30.MA1.22.27.0655
30"	32.000"	35.400"	13.700"	85.500 lbs	30.MA1.22.27.0812
36"	38.300"		TBA		30.MA1.22.27.0972
42"	44.500"		TBA		30.MA1.22.27.1130
48"	50.800"		TBA		30.MA1.22.27.1290

**STRONGBRIDGE INTERNATIONAL INC.**

10920 Baymeadows Road, Unit 27-302  
Jacksonville, FL 32256  
Phone: (904) 607-6384 Fax:(904) 565-2776  
[www.strongbridge.us](http://www.strongbridge.us)

**STRONGBRIDGE INTERNATIONAL (CANADA) INC.**

200 North Service Road West, Unit 1 Suite 381  
Oakville, Ontario L6M 2Y1  
Phone (416) 795-8962  
[www.strongbridgecanada.com](http://www.strongbridgecanada.com)

TEGA ELECTROFUSION FITTINGS MAY ONLY BE INSTALLED BY TECHICIANS CERTIFIED BY STRONGBRIDGE INTERNATIONAL INC. OR ITS DESIGNATED AND APPROVED AGENTS. CONTACT STRONGBRIDGE INTERNATIONAL FOR CURRENT CERTIFICATION DETAILS AND REQUIREMENTS.

